


NOWAR®

security equipment



security equipment



NOWAR®

NOWAR security equipment GmbH
Bielsteiner Straße 69
51674 Wiehl

Telefon: +49 (2262) 68081
Telefax: +49 (2262) 2494
E-mail: info@nowar.de
Internet: www.nowar.de

Managing Direktor: Rolf Arnds


The NOWAR security equipment Ltd. was established in 1992 by three persons who are well-known in the field of Police- and Military business.

NOWAR Ltd. is developer, manufacturer and seller of innovative and high-quality security equipment. Only high tech materials will be used for production of security items.

The company offers a wide range for products like

Special Duty Clothing
Boots
Gloves
Protection Equipment
Truncheons and Holster
Pistol Holster
Guns
Pistols
Ammunitions
Binoculars
Rifle Scopes
Laser Rangefinder
Defence Pepper Spray
Cameras
Special Tools
Flashlights
Ballistic Vests
Tactical Vests
Criminal Investigation Equipment
Etc.

The registered Trade Mark NOWAR is well known in Germany and many countries abroad.



ANNEX D - 001

I. Handcuff:

Perimeter minimum: 130 mm / 5.11 in

Perimeter maximum: 200 mm / 7.87 in

Closed dimensions: 230 mm / 9.05 in x 80 mm / 3.1 in x 9 mm / 0.35 in

Minimum rotating arm thickness: 0,5 cm / 0.19 in

The rotating arm has a fast, smooth, positive lock case pass through.

Minimum of 19 locking positions

Rotating swivels at each end of the cuff body and two-link connecting chain

Push button operated double-locking mechanism: the pin on the key for the hole on the top of the lock case will activate the double lock.

Weight: Not to exceed 0.5-kg / 1.33 lbs

Made of nickel plated steel

Professional police equipment



II. Handcuff holster:

Half open, fast draw single handcuff case

Heavy-duty rustproof black no-glare, no-wear snap closure

One hand re-holstering

Dual slot moulded belt loops

Fit belts from 45 mm / 1.77 in - 55 mm / 2.16 in

Professional police equipment



ANNEX D - 001

III. Belt keeper with hidden cuff key:

A cuff key is fixed on the snap and is hidden when the belt keeper is closed.

The cuff key fits the handcuff specified under I.

Keeper made of black Cordura nylon.

Heavy-duty rustproof black no-glare, no-wear snap closure

Fit belts from 45 mm / 1.77 in to 55 mm / 2.16 in

Professional police equipment



ANNEX D - 002

I. Plastic handcuffs:

Disposable self-locking restraints

Must be cut to be removed

No key required

Heavy-duty lightweight plastic


Minimum tensile strength: 330 kg / 730 lbs

Unit pack: 1000 ea

Minimum length: 760 mm / 29.92 in

Minimum thickness: 9 mm / 0.35 in

Professional police equipment

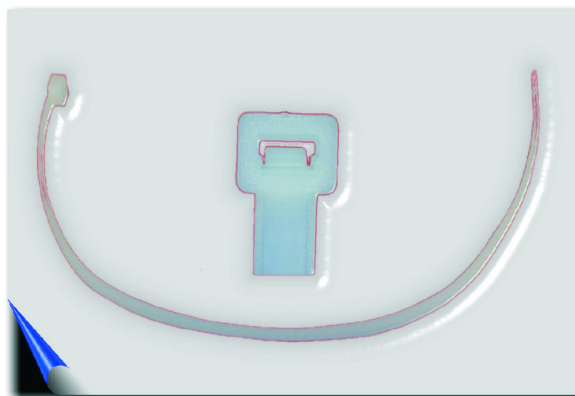

ANNEX D - 002

II. Plastic handcuff cutter:

Standard wire cutter pliers to be used for cutting plastic cuffs

Cutters will not injure restrained person when used

Professional police equipment

ANNEX D - 003

I. Baton:

Baton withstands a minimum of 4.5 tons / 9920 lbs of stress and remain Functional under this condition
 Corrosion resistant
 Expandable with snap of the wrist
 Retractable to carry on utility belt
 Lightweight metal alloy composition
 Silver shaft
 Black foamed handle producing a firm durable gripping surface to assure non-slip handling
 Closed length 200 mm / 8 in
 Expandable length 520 mm / 21 in
 Weight maximum 255 g / 8.9 oz
 User serviceable
 Individual serial numbers
 Professional police equipment



ANNEX D - 003

II. Holster for the baton

Made of Cordura
 Open-top holster
 Fit belts from 45 mm / 1.77 in - 55mm / 2.16 in
 To fit the expandable baton 520 mm / 21 in
 Additional pocket behind the holder to hold expanded baton
 The holster attaches to the belt with a military specification one-direction security snap.
 The holster has a black, no-wear, no-glare snap.
 Professional police equipment

ANNEX D - 004

I. Whistle:

Black thermal plastic

With a braid connecting ring

Size 50 mm / 1.96 in

Shrieking sound that will penetrate long distances,
traffic noise and crowd

Disturbance.

Black heavy nylon braid approximately 25 mm / 9.84 in
length with swivel snap



ANNEX D - 005

I. Rechargeable Mag-Lite with components:

I.I. Flashlight:

Length 32 cm / 12.59 in
 Weight with battery pack 870 g / 30.688 oz
 Weight without battery pack 480 g / 16.931 oz
 Head diameter 3.96 cm / 0.68 in
 Halogen lamp producing a bright, white, far-reaching light beam at 30000 peak
 Beam candlepower
 With continuous cam - action (zooming), creating a quick focusing spot-to-flood
 Beam
 With solid state recharging circuitry
 With precision machined high-strength aluminium alloy flashlight case
 Black hard anodised inside and out for optimum corrosion resistance and
 Durability
 Water-resistant seals to protect all internal components from harsh
 Environmental conditions
 360-degree electronic contact rings allowing the flashlight to be charged in any
 position
 Individually serial numbered for identification
 English warranty and owner manuals
 With versatile mounting brackets for wall mounting

I. Rechargeable Mag-Lite with components:

I.II. Rechargeable Ni-Cad Battery:

High capacity rechargeable battery providing over 1000 hours of operational life

ANNEX D - 005A

I. III. Recharging cradle:

Universal acceptance 12-14 volts DC
 Constant current solid-state integrated circuit
 regulator
 Charge rate 230 milliampere continuous
 360-degree positive charge contact
 Thermal overload protection
 Transient voltage protection
 Reverse voltage protection
 Red Light Emitting Diode (LED) indicating system
 is charging
 Mount in any position on flat surfaces

I. V. Car Adapter:

12-14 Volt DC cigarette lighter adapter
 12-14 Volt DC Power cord

I. I.VI. Converter:

Input 110/230 Volt AC 50 HZ
 Output 12-14 Volt DC
 Double insulated
 With European standard plug, 2-pins DIN
 49441
 DIN (German Industrial Standards Authority,
 equivalent of EIA, BSA etc)

I. VI. Brackets:

For quick release of the charger
 With release pin
 With engagement prongs
 With four holes for screws
 Approximately. 570 mm / 22.44 in x 470 mm /
 18.50 in

ANNEX D - 006



I. Flashlight Bulb:

Halogen bulb for MAG-Lite® model RX0019E



II. Rechargeable battery for Flashlight:

Rechargeable battery stick for MAG-LITE® model number RX0019E
High capacity rechargeable battery providing over 1000 hrs of operational life

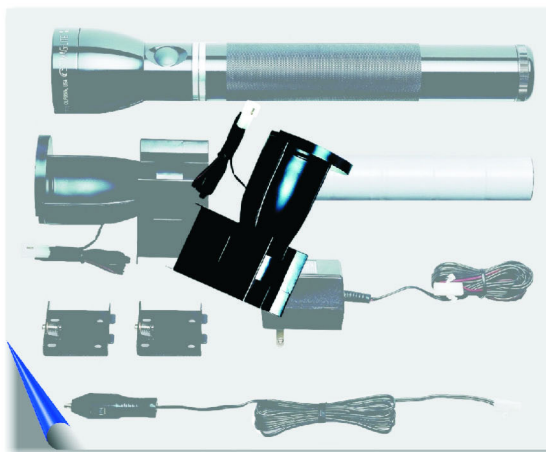
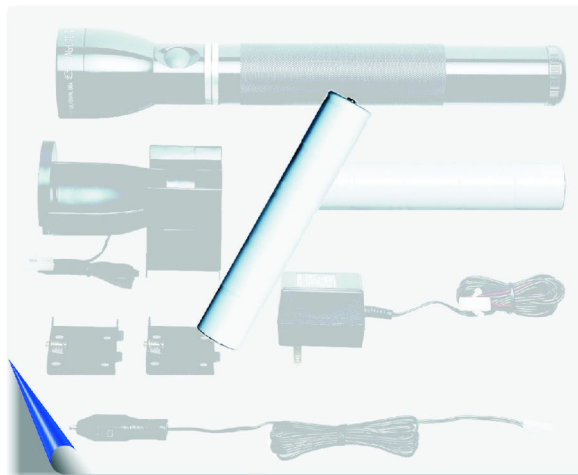



III. Charger for Flashlight:

Charger for MAG-LITE® model number RX0019E
Universal acceptance 12-14 volt DC
Constant current solid-state integrated circuit regulator
Charge rate 230 milliampere continuous
360-degree positive charge contact
Thermal overload protection
Transient voltage protection
Reverse voltage protection
Red Light Emitting Diode (LED) indicating system is charging
Mount in any position on flat surfaces

IV. AC Converter with cord for Flashlight charger:

Converter for MAG-LITE® model number RX0019E
Input 110/230 Volt AC 50/60 HZ
Output 12-14 Volt DC
Double insulated
With European standard plug, 2-pins DIN 49441

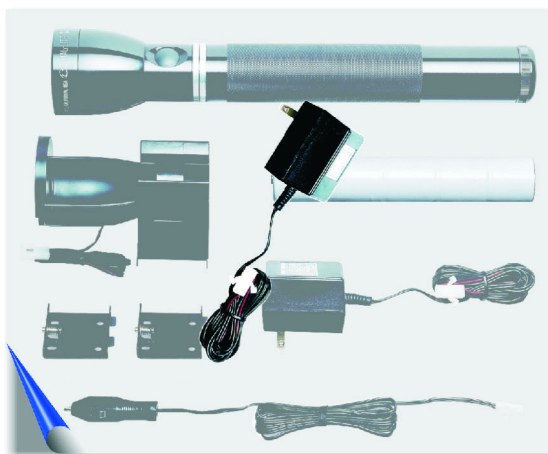

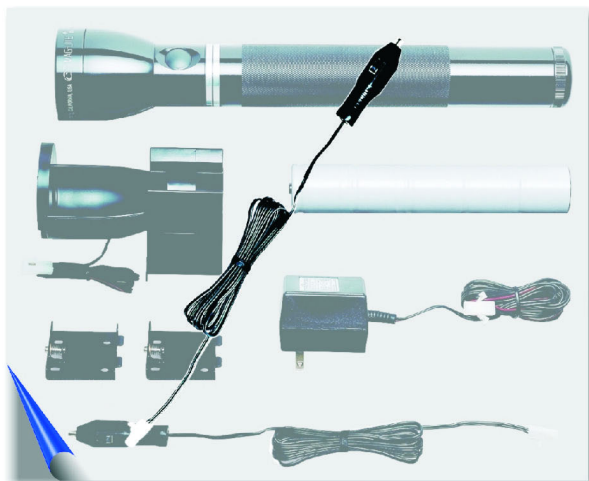

ANNEX D - 006A

V. 12 Volt DC power cord for flashlight charger:

Car adapter for MAG-LITE® model number RX0019E
 12-14 Volt DC cigarette lighter adapter
 12-14 Volt DC power cord
 (Existing equipment) No substitutes accepted

ANNEX D - 007

I. Flashlight holster:

Black Cordura flashlight holder
 Made of black Cordura
 Fit belts from 45 mm / 1.77 in - 55 mm / 2.16 in
 Single black, no-wear, no-glare snap
 Ring design
 Diameter 50 mm / 1.96 in




ANNEX - 007 II.

ANNEX - 007 I.

II. Flashlight cones:

Cones for MAG-LITE® model number RX0019E
 Luminous wands attach to flashlight
 Red colour
 Length 190 mm / 7.48 in



ANNEX D - 008

I. Pepper Spray, large size:

10% Oleoresin capsicum pepper spray formula

Pressure tank: Aluminium

Dimensions: Height 23,25 cm / 9.15 in
Circumference 19.94 cm / 7.85 in
Diameter 6,35 cm / 2.5 in

Weight: Empty can 170 g / 5.9 oz
Tare weight 350 g / 12.3 oz
Net weight 520 g / 18.34 oz

Output: Ballistic jet
Range up to 7 m / 22.96 ft
Minimum permanent spray time 12 sec.
Propellant nitrogen (13 bar / 1.8 psi at 21°C / 69.8°F)

Security / quality: ISO 9000 certified and EG-1836/93 complianced

Ingredients: Oleoresin capsicum irritant, water and other food-
Pharmacological proofed components such as
Propylene glycol and denatured alcohol.

The grip is equipped with a protection cap as a safety device Warranty
marked on the can
3-year shelf life



ANNEX D - 009

I. Personal defense pepper spray with holster:

10% Oleoresin Capsicum pepper spray formula

Pressure tank: Aluminium

Dimensions: Height 10,8 cm / 4.25 in
Circumference 9,91 cm / 3.9 in
Diameter 3,81 cm / 1.5 in

Weight: Empty cane 34 g / 1.99 oz
Tare weight 42 g / 1.48 oz
Net weight 76 g / 2.68 oz

Output: Ballistic jet
Range up to 4 m / 13.12 ft
Minimum permanent spray time 14 sec
Propellant nitrogen (9.65 bar / 1.39 psi per 21°C/69.8°F)

Security/quality: Certified of ISO 9000 and EG-1836/93 complianced

Ingredients: Oleoresin capsicum irritant, water and other food-
Pharmacological proofed components such as
Propylene glycol and denatured alcohol.

Safety device (protecting cap) for secure carrying in the holster on a belt

Warranty marked on the can
3-year shelf life



ANNEX D - 009A

II. Holster:

Black Cordura
Fits belts from 45 mm / 1.77 in - 55 mm / 2.16 in
Single black, no-wear, no-glare snap



ANNEX D - 010

I. Tire deflating device:

Stops vehicles safely

For deployment in seconds (maximum 5 sec)

Lightweight, compact, bi-directional 100% stainless steel hardware

Replaceable parts

Modular base with moulded sections.

Sections connected with stainless steel fasteners

to withstand multiple pursuits with speeds in excess of 210 KPH without damage

Deployment by pulling the unit across the road with an attached rope

on contact, the spikes pivot into the tire and the tip-guards are pushed down.

Spikes should become deeply imbedded into the tire

After contact the spikes remain in the tire

Hollow spikes to allow the air to escape slowly without causing a blow out or sudden loss of control.

The tire picks up 4-6 spikes with the deflating time of about 12-20 sec.

Housed in a hard plastic kit complete with 10 extra spikes, spike replacement Tool

180 detachable, hollow center spikes

Spikes approx. 3,5 cm / 1.37 in long, anti-corrosive, with non-reflective surface

Unit measures (60cm / 23.62 in x 50 cm / 19.68 in x 6,5 cm / 2.55 in) extends to 7.50 m / 24,6 feet

Weight with case less than 7,5 kg / 16.53 lbs

Supplied with minimum 9,15 m / 30.15 ft rope with clip, spool, a pair of safety glasses to standard of SEA or EN

English instruction manual



ANNEX D - 011

I. Traffic cones:

Brilliant red orange PVC plastic with white horizontal stripes
High visibility and highly reflective in all weather conditions
Height 500 mm / 19.68 in
PVC (Poly Vinyl Chloride)



ANNEX D - 012

I. Wrecking bar:

S-form
400 mm / 15.74 in long
Made of tempered steel

ANNEX D - 012

II. Wire, chain, cable, bolts and metal Cutter :

Precision cutting edges
Center cut for general purpose use
Tubular handles with rubber grips
780 mm / 30.70 long
For cutting steel diameter 12 mm / 0.47 in
Cutting Power 150 kg / 330 lbs per 1 square mm / 0.00155 sq. In



ANNEX D - 012

III. Measuring tapes:

Fiberglass, nonconductive, washable tape
With a folding hook ring on the end
Zero point at the start of the tape
Closed reel made of ABS Plastic
Manual rewind
Easy carrying handle
50 m / 164 ft long

ANNEX D - 012

IV. Walking measuring tape:

Measuring spectrum 0-9999.99 cm / 3280,51 ft
Single wheel system
For measuring indoor and outdoor on firm surfaces
Digital counter with good visible numbers (minimum size 1 cm)
Equipped with a telescoping handle for easy carrying
For vertical, overhead curved and contour measuring
Lightweight case for easy transport and storage





ANNEX D - 013

I. Vehicle inspection mirror assembly:

Hand held, telescopic inspection mirror
 Telescopic tube handle of black anodised aluminium
 From 1100 mm / 43.30 in to 2100 mm / 82.67 in
 Diameter of wide angle mirror 153 mm / 6.023 in
 Mirror rotates 135 degrees
 NATO Stock Number 5120-12-338-9146
 Adapter for Flashlight (MAG-LITE® model number RX0019E or equivalent)
 Lightweight
 Includes one spare mirror

II. Spare mirror for inspection mirror assembly NATO Stock Number 5120-12-338-9146

Fits vehicle inspection mirror assembly
 NSN 5120-12-338-9146


ANNEX D - 014

I. Tool kit:

Heavy duty tool kit with following items in metric measurements

- a.) Socket drive set metric
 Quick release ratchet 1/4 in
 Quick release ratchet 1/2 in
 Extension 52 mm, 130 mm, 255 mm
 Sockets 1/4 in 3.5, 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13mm
 Sockets 1/2 in 10, 11, 12, 13, 14, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32mm
- b.) Set of 5 screwdrivers
 3 parallel tips
 2 flared tips
- c.) Combination wrench set
 Metric system
 6, 7, 8, 10, 11, 12, 13, 14, 16, 17, 18, 19, 22, 24, 27, 30mm
- d.) L Hex Key Set metric 3, 4, 5, 6, 7, 8, 9, 10, 12, 14, 17, 19
- e.) Adjustable wrenches
- f.) Wire cutter
- g.) Pliers (7) diagonal cutter, groove-joint, long nose mini, long nose with Cutter, combination, water pump pliers
- h.) Tape ruler, 5 m, high-impact case, with lock, auto-return and belt clip easy to read
- i.) Hammer 300 g
- j.) Glasscutter
- k.) Flat file 200 mm
- l.) Chisel 200 mm
- m.) Crossing chisel 150 mm
- n.) Vernier callipers 200 mm


All tools certified as professional tools made of chrome vanadium (chromium-Plated)

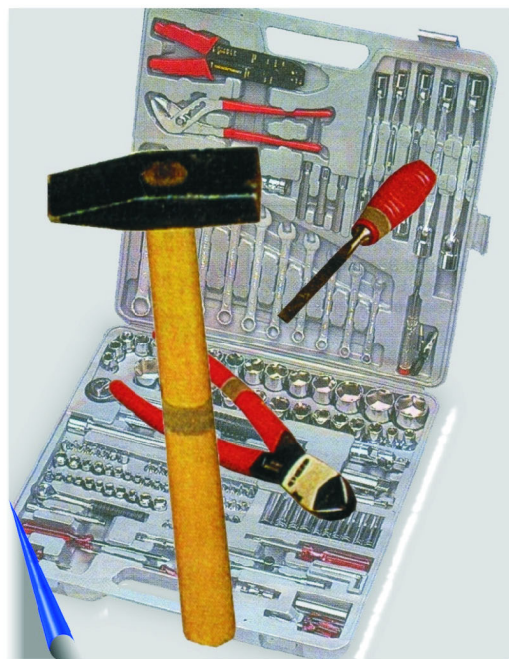

ANNEX D - 015

I. Signal flares / traffic control flares:

All weather emergency flares
 Wire stands
 20 minutes minimum burn
 Red burning colour
 Quick and easy to use
 NATO Stock Number. 1370-12-344-8357
 UN dangerous goods classification
 DG hazard-group 1.4 G
 UN Number 043 I
 Dangerous hazard group 1.4G Restriction on road
 and airfreight

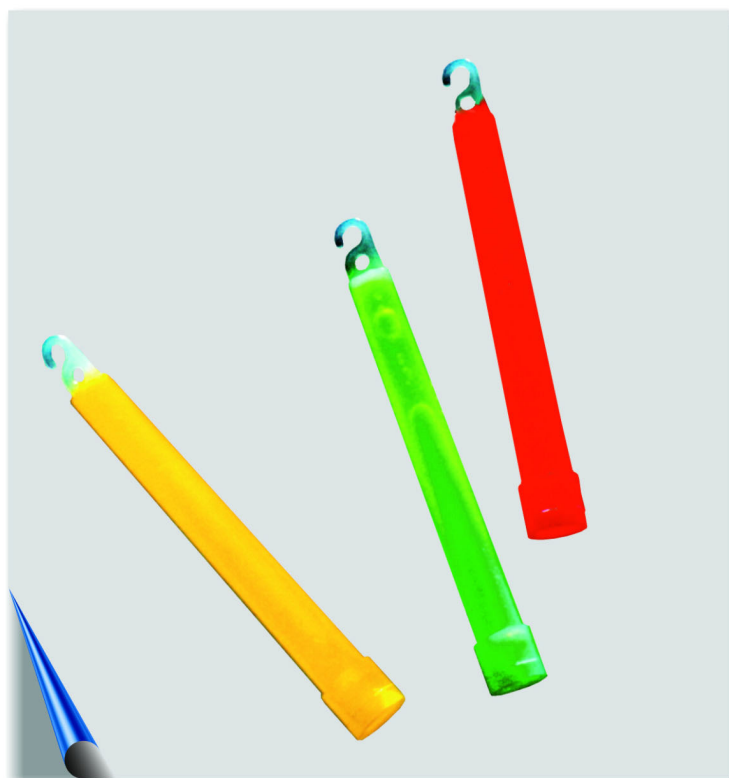

ANNEX D - 016

I. Long-duration light stick:

Bend and shake activation
 Non toxic
 Non-sparking
 Safe even in hazardous
 environment
 Colour red
 Length 15 cm / 5.9 in
 Glow time 8 to 12 hours

II. Long-duration light stick:

Bend and shake activation
 Non toxic
 Non-sparking
 Safe lighting even in hazardous
 environment
 Colour yellow
 Length 15 cm / 5.9 in
 Glow time 8 to 12 hours


III. Long-duration light stick:

Bend and shake activation
 Non toxic
 Non-sparking
 Safe lighting even in hazardous environment
 Colour green
 Length 15 cm / 5.9 in
 Glow time 8 to 12 hours

ANNEX D - 017

I Target silhouette:

Format 70 cm / 27.55 in x 50 cm / 19.68 in
Half body silhouette with indicating full arms
Printed on white heavy duty paper
Minimum 4 scoring rings
Printed on 44 lbs target paper or better

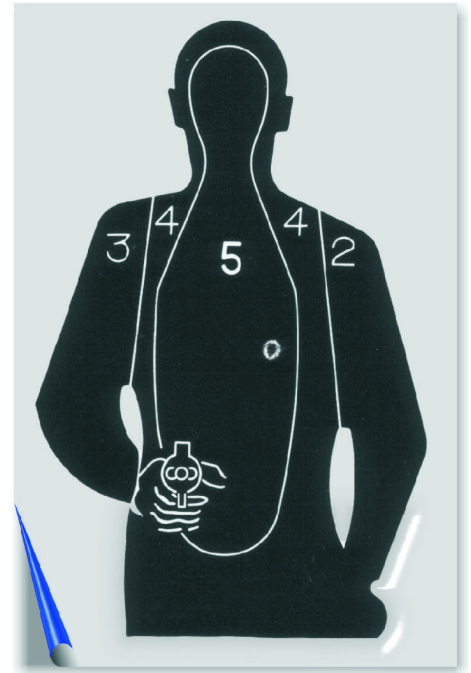

ANNEX D - 018

I. Portable folding reflective mini barricades (Polyethylene):

Day/night bright reflective sign surface
Diagonal white/orange warning stripes
white/orange
Dimensions: 90 cm / 35.43 in x 35 cm / 13.77 in
Lightweight and strong enough to stand alone

ANNEX D - 19

I. Barrier title tapes:

Title in bold black print
POLICE LINE DO NOT CROSS
On wide visible yellow vinyl
Size: 8 cm / 3.19 in x 300 m / 984.25 ft
In dispenser box with cutter



ANNEX D - 020

Breath Analyzer-Alcohol Test:

Transportable, lightweight compact analyser
Measuring range from 0-6 ‰
Measuring error max below 1 ‰ +/- 0,05‰
Measuring error max above 1 ‰ +/- 5% of measured value
Measuring error max above 2 ‰ +/- 10% of measured value
Temperature range between -5°C/23°F to +45°C / 113°F
Ambient pressure from 600 to 1400 HPA
Sampling exhalation time 4 seconds to 6 seconds
Automatic start of sampling and measuring
Minimum breathing volume 1.2 liters
Test / Charge: up to 350 Tests
Weight maximum 600 g / 21.16 oz including batteries
Supplied with a car adapter 12/14 Volt, 3 m tread-proofed cable, voltage
Monitor and regular for discharge protection
Charging station 110/240 Volt, 50/60 Hz. European standard plug,
2 pins DIN 49441
Electrochemical fuel cell sensor type
Disposable mouthpieces with valve to prevent reverse breathing
Integrated flow sensor measure breath volume and breath flow
User selectable units ‰, %, mg/l, mg/ml
Simple mode measuring of PASS-ALERT-FAIL
Data memory stores up to minimum 80 measurements, including time and date
PC interface for transmission of data foots and statistical evaluations
Supplied in a transportable hard plastic case
Suppled with a manual and spare part list and service location worldwide.



ANNEX D - 020A

I. Mouth pieces for breath analyzer:

Disposable mouthpieces
 With valve to prevent reverse breathing
 Pack with 25 pcs. individually packed
 Siemens Alcoquant 3020®™ breath alcohol analyser



ANNEX D - 020A

II. Rechargeable battery pack for AlcoQuant 3020®™ :

Ni-CAD 2,2 Ah
 Siemens Alcoquant 3020®™ breath alcohol analyser

ANNEX D - 020A

III. Car adapter for AlcoQuant 3020®™ :

12 VDC
 Tread-proof cable 3 m / 9.84 ft length
 With voltage monitoring and regulator for discharge protection
 Siemens AlcoQuant 3020®™ breath alcohol analyser



ANNEX D - 020A


IV. Needle printer for AlcoQuant 3020®™ :

Transportable needle printer with connection cable
 Ni-Cad rechargeable battery
 Charging electronics
 Siemens Alcoquant 3020®™ breath alcohol analyser

ANNEX D - 020A

V. Printer paper for needle printer for AlcoQuant 3020®™ :


Roll of paper
 1 pack with 5 rolls
 Siemens AlcoQuant 3020®™ breath alcohol analyser



ANNEX D - 021

I. Ink roller:

Multiple use inking rollers
 Hard surface
 Heavy-duty pedestals
 5 cm / 1.96 in wide
 Chromed brass
 Professional crime investigation equipment

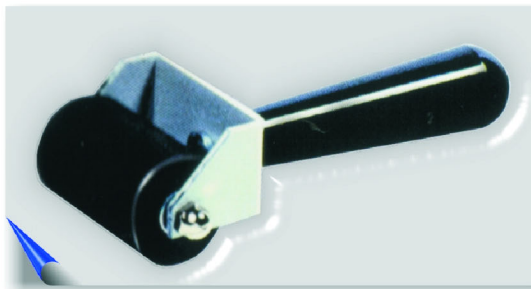


ANNEX D - 022

I. Evidence bags:

Reusable heavy-duty zip-lip evidence collection bag manufactured of 0.1 mm Polyethylene
 Includes a white information block which can be written on with pen, pencil, marker etc.
 Bag size (+/- 10%)
 Professional crime investigation equipment

I.I.	size	70 mm / 2.75 in x 100 mm / 3.93 in
I.II.	size	80 mm / 3.13 in x 120 mm / 4.72 in
I.III.	size	100 mm / 3.93 in x 150 mm / 5.09 in
I.IV.	size	120 mm / 4.72 in x 180 mm / 7.08 in
I.VI.	size	150 mm / 5.09 in x 200 mm / 7.87 in
I.VII.	size	170 mm / 6.69 in x 250 mm / 9.84 in
I.VIII.	size	230 mm / 9.05 in x 350 mm / 13.77 in
I.XV.	size	270 mm / 10.62 in x 450 mm / 17.71 in

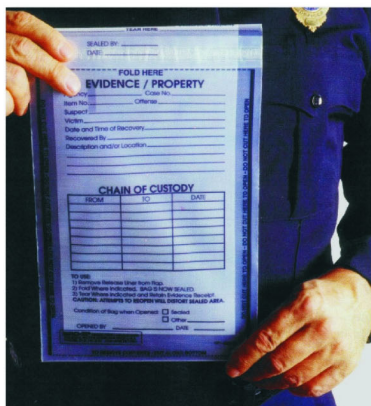

ANNEX D-022
I.



ANNEX D-022
II.

II. Evidence collection jars:

Heavy duty
 Thickness 1 mm
 Polyethylene evidence containers with hardtop
 For liquid and solid form
 Professional crime investigation equipment

II.I.	size	100 cubic cm / 3.38 fl oz
II.II.	size	170 cubic cm / 5.7 fl oz
II.III.	size	500 cubic cm / 16.91 fl oz
II.IV.	size	1000 cubic cm / 33.82 fl oz



II. Evidence identification label:

Size 6 cm / 2.36 in x 3 cm / 0.11 in
 Colour white
 Pressure sensitive adhesive
 Coated paper stock for use with pen or evidence marker
 100 labels per dispenser
 Professional crime investigation equipment

ANNEX D - 023

I. Evidence security tape:

Pressure-sensitive evidence tape
 To reveal any evidence of tampering
 For use with pen, pencil, marker etc.
 Printing in black on the top surface EVIDENCE
 Warning! Police Seal! DO NOT REMOVE
 Bright-yellow colour
 Size 3,5 cm / 1.37 in x 7 cm / 2,75 in
 Supplied with a handy dispenser carton with cutting blade
 For use on polyethylene bags, glass, plastic, wood, paper, cardboard and wood
 100 labels per dispenser
 Professional crime investigation equipment

ANNEX D - 024

I. Combat light rechargeable:

20.000 CP
 With NI Cad battery charger and cord with European standard plug, 2-pins,
 Recharge time up to 12 hours for minimum 50 minutes of continuous burn time
 Approximate measure: 17,5 cm / 6.88 in
 Colour black
 With 110/220 VAD 50/60 HZ and 12-14 VDC charger, European standard plug
 2 pin DIN 49441 and international plug adapters

II. Holster:

Made of black Cordura
 Fits belt widths from (45 mm / 1.77 in - 55 mm / 2.16 in)
 Single Black, no-wear, no-glare snap



ANNEX D - 025

I. Flashing warning lamps:

Yellow flashing warning lamps
 Minimum six per minute flashing rate
 Solar battery operation, solar cell recharge
 Stand-alone unit
 Height 20 cm / 7.87 in - 30 cm / 11.81 in
 High capacity long-life rechargeable battery



ANNEX D - 026

I. Security light:

Blue rotating light
 Magnetic vehicle roof mount
 Power cord length 5 m / 16.40 ft
 12-14 VDC operation
 Fits standard auto cigarette lighter
 remains fixed to the vehicle at
 speeds up to 180 km/h
 (Certified)



ANNEX D - 027

I. Head lamps:

With rotating bezel to focus the beam
 With standard bulb, backup bulb and
 halogen bulb
 For use with battery
 2 sets of Batteries included
 2 spare bulbs
 Approximate weight: 200 g / 7.05 oz
 Operating hours standard bulb 4.5 Volt
 19 hours
 Operating hours bulb 3 AA Cell 9 hours
 4,5 Volt halogen bulb 5 hours



ANNEX D - 028


I. Gloves for tactical operations and climbing:

KEVLAR
Flame and flash protection
100% KEVLAR on entire back and leather form-fitting palm
Cut resistant



II. Riot control gloves:

Gloves for riot control
Cut resistant
Integral punch and stab protectors
Light metal segment system on the back of the glove. Approximate segment
Size: 30 cm / 11.81 in x 11 cm / 4.33 in
Covered with high tear-proof
Cordura
Basic gloves made of black leather
Hole for the trigger finger on the left and right glove
Velcro strap for adjustable
Closure



ANNEX D - 029

I. Tactical operational vests:

Lightweight vest maximum 800 g
Constructed of black Cordura
Flameproof (Certified)
6 pockets
Universal pistol holster
Secured by an adjustable web strap
Emergency drag handle on the back
One ring on both shoulders
No ballistic properties
Universal size
Professional crime investigation equipment



ANNEX D - 030

I. Tactical operational goggles:

2,2 mm / 0.15 in light fragmentation ballistic lens
Anti abrasion, anti-fog coating
Easy pull straps with quick release tabs
One size for fits
Professional crime investigation equipment

ANNEX D - 031

I. Tactical hood:

Colour: black
Size: universal
Material: flame resistant cotton



II. Knee protector:

Colour black
Size: universal
Material: Polypropylene
Shock absorbing



III. Elbow protector:


Colour: black
Size: universal
Material: Polypropylene
Shock absorbing

IV. Abdominal Protection for women:

For martial arts training
Easy-care
Colour: white
Size: medium
washable

V. Abdominal Protection for women:

For martial arts training
Easy-care
Colour: white
Size: large
washable



ANNEX D - 032

I. Police bag:

Bag for transporting tactical police equipment

Made of black Cordura

Size: 70 cm / 27.55 in x 40 cm / 15.7 in x 40 cm / 15.7 in

4 inside pockets

With zipper closure

Heavy-duty shoulder straps

Solid heavy weight construction

The bottom of the bag is lined with stiffeners



ANNEX D - 033

I. Identification bands:

Tri-illuminate band with adhesive closure

Adult size

With fine line, permanent writing marker packed in a box

Different colour (white, red, blue, pink)

For one time locking (security sealed)



ANNEX D - 034

I. Ladders:

Telescopic ladder
 73 cm / 28.74 in up to 350 cm / 11.84 ft
 Maximum weight 10 kg / 22 lbs
 Includes transport bag (not shown on the picture)
 Mounting device to secure to the vehicle

ANNEX D - 035

I. Door opening system:

System for opening house and car doors and barriers to entry
 Hydraulic hand pump system
 Hand-pump power 400 bar minimum
 Cutter power of up to 7.500 kg / 16535 lbs
 Ram bar buster power up to 2.500 kg / 5511 lbs
 Spreader power up to 2.500 kg / 5511 lbs
 In a transportable kit
 Maximum weight 20 kg / 44 lbs

II. Outside door buster:

Door buster for opening outward opening doors
 Max weight 16.5 kg / 36.37 lbs
 Working pressure minimum 400 bar
 Length opened approximately 940 mm / 37 in
 Length closed approximately 700 mm / 27.55



ANNEX D-035
I.

ANNEX D-035
II.

ANNEX D - 036

I. Universal crime scene search kit:

25 lifters, black 4 cm / 1.57 in x 6 cm / 2.36 in
 25 lifters, white 4 cm / 1.57 in x 6 cm / 2.36 in
 1 lifting-tape dispenser
 1 Pack / 50 lifted-print backing sheets
 1 fixoplast lifting tape (5 m)
 10 fingerprint lifters black 13 cm / 5.11 in x 18 cm / 7.08 in
 10 fingerprint lifters transparent 13 cm / 5.11 in x 18 cm / 7.08 in
 Different powders
 Fingerprint brush hair bristle flat 3 cm / 1.18 in
 Fingerprint brush hair bristle flat 6 cm / 2.36 in
 Fiberglass fingerprint brush
 Latent print feathered duster
 Flashlight with reflector mirror incl. Batteries
 Print evidence marker white
 Print evidence marker black
 Pair of scissors
 Ridge counter
 Illuminated magnifier (minimum magnifying 5x)
 Pair of cotton gloves
 Aluminium case
 Inside compartments separated with foam walls
 Professional crime investigation equipment



ANNEX D - 037

II. Fingerprint ink sheets:

7,5 cm / 2.95 in x 12,5 cm / 4.72 in
 Booklet of 10 sheets
 Consists of transparent vinyl sheets pre-inked with quality grade of fingerprint ink
 Ink will be quick drying and quickly absorbed by any type of record card
 Each sheet has a matt acetate cover, to protect the fingerprint ink from
 Drying or becoming contaminated by foreign matter such as dust etc.
 Professional crime investigation equipment


I. Fingerprint ink:

Quick drying permanent black ink
 Tube: 60 ml / 2 fl oz
 Professional crime investigation equipment



III. Fingerprint ink remover towelettes:

Disposable individually wrapped cleaning wipes
 Single hermetically sealed foil package
 Box of 100 towelettes
 Professional crime investigation equipment

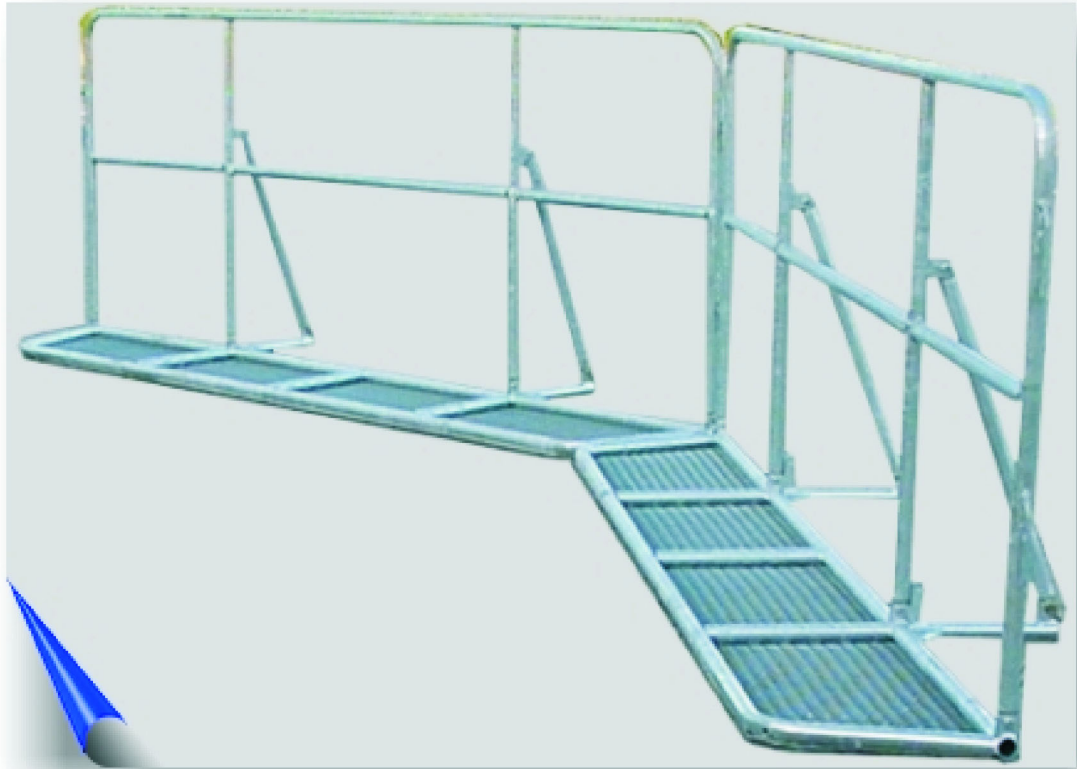

ANNEX D - 038

I. Crowd control barrier - Folding, portable, 3,9 cm diameter, galvanized steel:

Dimensions of barrier 3 m / 9.8 ft by 1.1 m / 3.6 ft with integral cross bar at 600 mm / 23.26 in height welded to frame.

Vertical support to main frame 800 mm / 31.49 in from each end.

Barrier is mounted on folding base plate.

Crowd side of plate is provided with frame of same gauge galvanized steel as main barrier and is quadrilateral shaped with side attached to barrier 3 m / 9.8 ft and side away from barrier 2700 mm / 106.29 in.

Base plate is strengthened by cross members length on crowd side 460 mm / 18.11 in containing hinges.

All four uprights of main barrier hinges are secured to main barrier by steel Nuts and bolts.

Nuts are burred over bolts.

Base frame has 2 cm / 0.78 in steel mesh along full length in four separate Strips. Mesh strips are supported on base from under by L shaped steel Supports welded to mesh and frame.

2 central base cross members are extended on other side of barrier with locking point form, which are attached by hinge bolt male/female arrangement on frame of central supports.

Mesh base will stand on by crowds and thus be self-anchoring and stable linked triangular on other side will also act as a stabilizer.

All bolts must be burred over with exception on far base locking support thus minimizing risk of crowd dismantling and flattening barrier.

Additionally on end of each barrier there is a welded steel locking device of hook and eye construction to lock barrier with another barrier. Each barrier is presented to the other at 90-degree angle.

Capable of turning barrier in line with its neighbor.

It is ensured that barrier cannot be separated from its neighbor.

Certified for use by law enforcement agencies.





ANNEX D - 039


I. Full body protective shield:

Shield is designed to protect the user from violent blunt trauma attacks

Glass-clear Polycarbonate
 Transparent 3 mm / 0.11 in thick
 2 cm / .78 in buffer zone between holding device and shield
 Vacuum formed
 Supplied with self-opening device in emergency cases
 Armrest covered with transparent shock absorbing rubber tube
 Handle made of aluminium
 Weight maximum 3500g / 8,8 lbs
 Rectangular shield for full body protection
 Size 58 cm / 21.37 in x 100 cm / 39.37 in
 Maximum size 60 cm / 23.62 in x 130 cm / 51.18 in
 Equipped with holding device for riot baton
 Certified for use by law enforcement agencies

II. Riot Baton used with full body protective shield:

Body made of glass fiber supported polyester, covered with polyurethane
 Length 75 cm / 29.53 in / 0.78 in
 Diameter of the baton 30 mm / 1.18 in
 Cold-resistant up to -40°C / -40°F
 Chemical resistant
 With stop disk
 Disk diameter 6 cm / 2.36 in (+/- 1 cm / 0.39 in)
 Colour black
 No skid handle
 Weight minimum 450 g / 15.87 oz - maximum 500 g / 17.63 oz
 Certified for use by law enforcement agencies

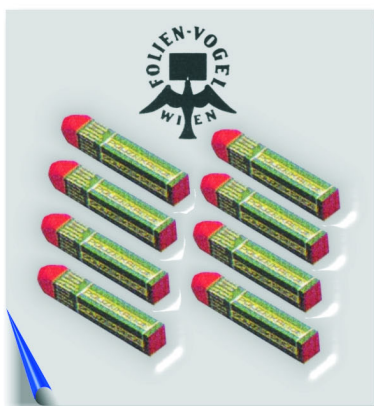

ANNEX D - 040

I. Street marking chalk:

For temporary marking on dry surface like concrete or asphalt
 Colour red
 Diameter minimum 15 mm / 0.59 in maximum 18 mm / 0.70 in
 Long minimum 100 mm / 3.93 in maximum 120 mm / 4.72 in
 Packed in boxes of 12 each



ANNEX D - 041

I. Illuminated traffic control baton:

Flashlight traffic control model
Power supplier by batteries
Illuminated with lamps on both ends
One side green for go
One side red for stop
Red side shows inscription STOP POLICE
Handle made of polyethylene in high visible colour (white)
With a toggle switch on the handle
Length 450 mm / 17.71 in
Diameter of the reflective cap 100 mm / 3.9 in

Length of the handle 150 mm / 5.9 in
Weight maximum 500g / 17.63 oz
Supplied with a leather sling on the handle
Include batteries and 2 spare bulbs
Certified for use by law enforcement agencies

ANNEX D - 042

I. Fluorescent police vest:

Police vest with reflective strips
100% Polyester
Yellow high visible neon colour
With grey silver reflectors
With minimum 5 button/snaps
Reflective strips from the shoulders to the middle of the vest
two strips around the vest placed in the lower bottom third of the vest
Police logo POLICE in 7,5 cm red letters on the back
One size fits all





ANNEX D - 043

I. Body bags:

Air tight, white opaque plastic construction
 Thickness 0,4 mm / 0.01 in
 With polyester zip fasteners down the centre of the bag
 With 6 heavy - duty handles, three on each side
 Length 2150 mm / 84.64 in
 Width: 800 mm / 31.49 in

ANNEX D - 044

I. Handheld metal detector (ground search):

Simple operation
 Variable target selection
 Detects all ferrous and non-ferrous metals, particularly bullets
 Quick action armrest
 Stereo headphones
 Main unit will be supplied with a handle
 Operation on rechargeable batteries
 Charger voltage: 110/220 Volts, 50/60 Hz,
 With European standard plug, 2-pins DIN 49441,
 and international plug adapters
 In hard-shell carrying case (not presented on the picture)



ANNEX D - 045

I. Handheld metal detector (individual)

Detects weapons made of metal
 Maximum detection distances:
 Medium size pistols: 23 cm / 9.05 in (+/-10%)
 Large pocket knife: 15 cm / 5.9 in (+/-10%)
 Razor blade: 7,5 cm / 2.9 in (+/-10%)
 Hatpin: 2,5 cm / 1 in (+/-10%)
 Large surface scan
 Indication by speakers, red light LED and acoustical signal through earphones
 Enclosure constructed of Polycarbonate-fiber reinforced material
 Supplied with mono earphone
 Operating on Ni-Cad rechargeable batteries
 weight 0,480 kg / 17.63 oz
 Length 42 cm / 17.71 in
 Operating Frequency: 90-100 kHz
 Resists interference
 Holster constructed of black Cordura (not presented on the picture)
 Two sets of batteries included



ANNEX D - 046

I. Work gloves:

Heavy-duty gloves
 Made of tough, natural cowhide
 Palms, fingers and heel are made of side-split cowhide leather
 Pre-curved palm
 Back of gloves made of canvas
 One size fits all



ANNEX D - 047

I. Voice tape mini recorder:

Voice operated micro tape recorder-dictation machine
With tape counter
Minimum continuous recording battery life up to 20 hours
Left / right output jack for stereo headphones
Two tape speeds
Automatic shut off at tape end
Cue and review
LED indicator shows remaining battery power level
Hand strap
Battery operated (rechargeable batteries)
12-14 VDC jack for Charging/operation
Charger 110/220 Volt, 50/60 Hz, with European standard 2-pins
DIN 49441
Plug and international plug adapters
Pause function
Earphone socket with main adapter sockets
Supplied with 5 micro tapes
Including batteries
Splash waterproofed protection case. (not presented on the picture)



ANNEX D - 048

I. Ear protectors:

Target practice hearing protection
Valve system to restrict the entry of high-level sound impulses
Allows normal conversation to be heard
Adjustable headbands
Fold up style Foam filled ear cushions
Lightweight

ANNEX D - 049

I. 35 mm camera:

TTL auto focus

Auto -exposure 35 mm SLR with built in TLL auto flash

24x36-mm format for 35 mm perforated cartridge films

ISO 25-5000

With programm mode

Electronically controlled shutter

Speed range in auto mode 1/2000 - 30 sec.

Lens mount with bayonet mount

Film auto wind / rewind

Built in series-controlled retractable TLL Auto flash

Power source: rechargeable batteries

Supplied with batteries and charger

Charger 110/240 Volt 50/60 Hz, with European standard plug, 2-pins DIN

49441 and international plug adapters

Lightweight body with batteries 400 g / 14.11 oz



II. Zoom lens: 35 mm - 80 mm

F/4-5.6 zoom

Angle of view 60-30 degree

Weight 200 g / 7.05 oz

III. Zoom lens: 80mm-200mm

F/4.7-5.6 zoom

Angle of view 30-12 degree

Weight 300 g / 10.58 oz

IV. Additional options:

Flash unit

35 mm lens cover

Rechargeable batteries and charger

Charger 110/240 Volt 50/60 Hz, with European

standard plug 2-pins DIN 49441

and international plug adapters

V. Hard carrying case:

With light structural foam to fit all above photo equipment

(Not presented on the picture)



ANNEX D - 050

I. Digital camera

Uses standard 3 1/2" floppy disks
1/3 in CCD image sensor
1.300 000 pixel
VGA/XGA
Optical 8x Zoom Lens 4.75 - 38 mm F/2.8-3,0
16x digital zoom
2.5 in LCD colour display viewfinder
Auto focus
Manual focusing
Records up to 4 fine / 40 standard images in JPEG Format on 3.5 in floppy disk
Full auto white balance
Built in auto flash, E-mail mode

MPEG and voice mode, with rechargeable batteries included
Shoulder strap (not presented on the picture)
Transport case (not presented on the picture)
Charger 110/240 Volt 50/60 Hz, with European standard plug 2-pins DIN 49441
And international plug adapters



ANNEX D - 051

I. Instant developing film camera:

Auto film advance
Auto focus
Auto flash built in
Electronic viewfinder
Film counter
Information on distance and light
For use with Polaroid film 600 cartridges



ANNEX D - 052

I. Camera tripod:

Tripod designed for use with all 35mm cameras and video with 3-way pan-head with sure-grip pan/tilt control handle for fluid smooth pans and tilts
Supplied with quick-release camera platform
With preset friction control system for quick and easy vertical camera positioning
3-section tubular aluminum leg
Diameter of the legs 23mm / 0.9 in
Radial leg braces for maximum stability and convenient tripod setup
Rubber tipped feet for no-slip setups
Maximum extended height: 150cm / 59 in
Folded length: 57cm / 22.44 in
Weight: 1500g / 3.3 lbs

ANNEX D - 053

I. Video camera:

Uses full size VHS cassettes
Digital wide-angle auto-focus
Manual focus lens with digital zoom
Macro capability
Low light capacity
Digital effects, strobe, wipe, gain-up and fade in out
Date and time recording
Supplied with rechargeable batteries
Supplied with batteries and charger
Charger 110/240 Volt 50/60 Hz, with European standard plug 2-pins DIN 49441 and international plug adapters
AV cables
External video light
System carrying case for camera and accessories



ANNEX D - 054

I. Digital video camcorder:


Digital video recording resolution minimum 500 lines
2.5 in (+/- 10%) LCD color screen
Built in speakers
Digital effects
Digital photo
F: 1.7 lens with minimum 10-x optical/ 250 digital zoom
Time/date code and insert edit
Picture stabilizer
Video capture software
Remote control
With rechargeable batteries
Charger 110/240 Volt 50/60 Hz, with European standard plug 2-pins DIN 49441 and international plug adapters
Recording time minimum 90 minutes on one tape
Supplied with 5 tapes
Carrying case



ANNEX D - 055

I. Police pocket-notebook:


Size: 12cm / 4.5 in x 7.50cm / 3 in
Fits pocket of a police shirt
Spiral binding on the top
Ruled with approximately 65 leaves
Sturdy craft cover
Plain colored cover

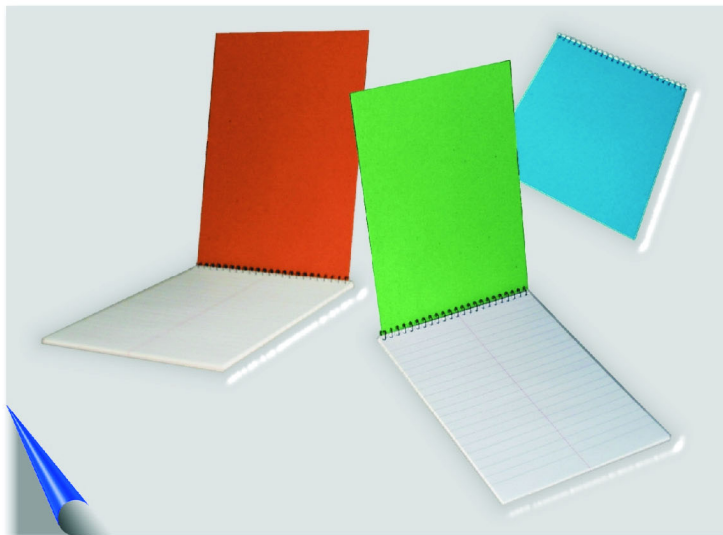

ANNEX D - 056

I. Clipboard:


To protect documents form size A5
Open 35cm / 13.78 in wide x 23cm / 9.05 in length
Closed 18cm / 7.08 ft wide x 23cm / 9.05 in length
Rigid PVC cover that folds over,
Opens to the left side
Rivet mounted heavy-duty clip on the right hand side
Right-hand side is used for holding documents and is sufficiently hard to allow the user to fill out multiple copy forms
The left-hand side is equipped with an internal pocket
On the left hand side of the board there is a partition for storing forms in A5 (210mm/ 8.26 in x 148mm / 5.82 in format
Flexible PVC hinge joining the two rigged boards allowing 1cm / 0.39 in maximize space between board for paper when unit is closed
Integral penholder placed on the left side of the right-hand board
Plain dark color of the board



ANNEX D - 057

I. Dust mask:

Easy breathing disposable respirator masks
 Protects against dust and mists
 Braided elastic fabric headband
 Naturally contoured to fit covering mouth and nose
 Contoured aluminum band to seal around the nose
 Inner foam seal
 One size fits all
 Approved by: NIOSH (National Institute for Occupational Safety and Health) or EN (European Norm)

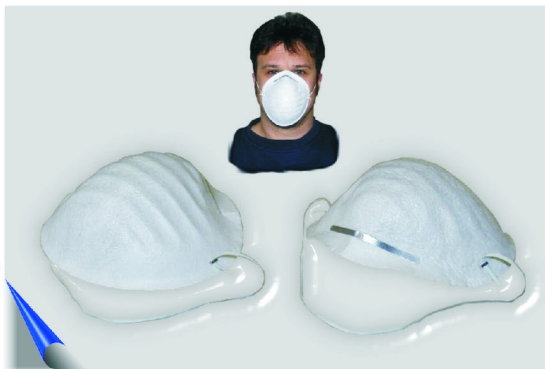

ANNEX D - 058

I. Rain suits:

100% water resistant nylon raincoat
 130cm / 50 in long
 Snap cuffs
 Sealed seams
 Raglan sleeves
 Pass through pockets
 High visibility orange or yellow
 3M[®]™ silver reflective stripping around torso and cuffs
 On the back in reflective silver letters printed P O L I C E

Men's sizes: M, L, XL, and XXL
 Women's sizes: S, M, L, and XL

ANNEX D - 059

I. Rain boots:

Water proof PVC boots
 Thick soles
 One-piece injection molded
 Resistant to organic chemicals, acids oils and grease
 Color black

Sizes: S, M, L, and XL





ANNEX D - 060

I. Plaster and silicone rubber casting kit:

5 kg / 11.02 lbs of plaster
 1 kg / 2.02 lbs of silicone rubber liquid plus catalyst
 1 kg / 2.02 lbs of silicone rubber solid kit
 Silicon rubber needs to be long lasting and quick setting maximum 10 minutes after adding the catalyst
 Packed in containers to 1 kg / 2.02 lbs

ANNEX D - 061

I. Casting kit:

3 x 1 kg / 2.2 lbs of alabaster plaster
 One flexible self-cleaning mixing bowl
 700 cubic cm / 23.67 fl oz
 One spatula 3cm / 1.18 in
 One spatula 6cm / 2.36 in
 Two footprint casting frame
 One metal screen to scatter plaster
 One footprint fixing spray
 One silicone release agent spray
 One tape measure 2 m / 6.56 ft
 One pair of scissors
 One round tipped tweezers
 One soapbox with soap
 One towel
 One water container 500 cl / 16.91 fl oz




Aluminum carrying case with cut foam inserts to fit all above equipment

ANNEX D - 062

I. Crime scene marking equipment:

2 sets of number plates from 1 to 20
 Minimum plate size: 8cm / 3.14 in x 12cm / 4.72 in
 5 each 18cm / 7.08 in rods
 5 each 25cm / 9.84 in rods
 10 round (diameter minimum 5.5cm / 2.16 in) standing rods with tip
 In a shoulder bag with carrying straps



ANNEX D - 063

I. Fingerprint marking powder (Metal-Powders):

All containers 50g / 1.76 oz

I. I. Silver powder:

Lightweight

For vehicles
Glass
Iron
Hard-plastic
Cellophane



I. II. Silver powder:

Standard weight
For all materials and surfaces

I. III. Silver powder:

Very heavy weight

For glossy and rough paper
Cardboard
Varnished wood

ANNEX D - 064

I. Fingerprint marking powder (Oxide-Powder):

All container: 50g / 1.76 oz

I. I. Black powder:

Lightweight

For glossy papers
All kinds of plastic materials

I. II. Black powder:

Standard weight

For glossy and rough papers
Cardboard
Tin
Glass



I. III. Black powder:

Very heavy weight

For glossy and rough paper
Varnished wood
Cardboard

ANNEX D - 065

I. Fingerprints marking powder (Color-Powder):

All containers: 50g / 1.76 oz

I. I. Color powder:

Light heavy

For iron
Barrels
Cartridges
Vehicles
Tin
Cellophane
Glass



I. II. Color powder:

Standard weight

For rough papers
Cardboard
Wood
Iron
Glass
Plastic

I. III. Color powder

Heavy weight

For tin-plates
Vehicles
Iron
Hard-plastic
Bakelite

ANNEX D - 066

I. Fingerprints marking powder (Magnetic-Powder):

All containers: 50g / 1.76 oz

I. I. Silver magnetic powder:

Weight heavy

For porous surfaces
Raw wood
Leather
Papers

I. II. Black magnetic powder:

Weight heavy

For porous surfaces
Raw wood
Leather
Paper



ANNEX D - 067

I. Fingerprint magnifier:

Professional class magnifier
 Stand-alone type
 Telescoping type to adjust the focal length
 Diameter 4,5cm / 11.71 in
 Changeable discs
 Provided with following lens discs (+/-5%):
 2.5 (10 diopter) x magnifying
 4.0 (16 diopter) x magnifying
 4.5 (20 diopter) x magnifying
 Cast in solid stainless steel
 Size (+/- 5%) Height: 14.5cm / 5.70 in
 Width: 10cm / 3.93 in
 Depth: 9cm / 3.54 in



ANNEX D - 069

I. Fingerprint classification ridge counter:


Counts and traces fingerprint ridges
 Push button retraction
 Approximate length 15cm / 5.9 in



ANNEX D - 070

I. Scalpels:

Sterile, disposable and individually wrapped
 Approximately length 15cm / 5.9 in
 Plastic grip

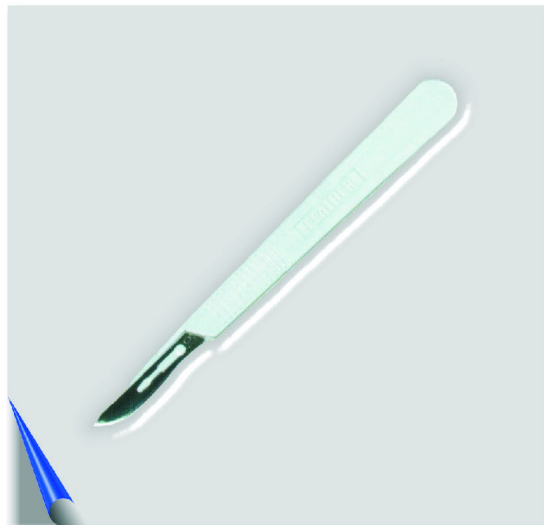


ANNEX D - 068

I. Full face respirator:

NIOSH (National Institute for Occupational Safety and Health) or EN (European Norm) approved respirator
 Neoprene rubber mask body
 Visor made of scratch resistant Plexiglas with 180° visibility
 Connectors made of robust plastic inclusive inhalation and exhalation valve
 Standard threading according to EN 184-1 specification
 Weight maximum 600g
 Supplied with a gas and vapor filter
 Supplied with a carrying case
 One size fits all
 Includes replacement filter cartridge



ANNEX D - 071

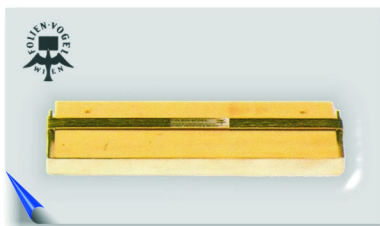

I. Fingerprint card holder:

Stabilizes fingerprint forms
Screw on bracket for secure desk/table mounting
Fits fingerprint cards size A4 (210mm / 8.26 in x 297mm / 11.67 in)
Cards should fit snugly under metal frame
Base fitted with non-skid rubber pads to prevent sliding

ANNEX D - 072

I. Firearms residue collection kit: (Paraffin Wax method)



Kit used to determine contact or proximity with fired weapons
Covered carrying case with cut foam insert containing following:

- 10 Sealed glass ampoules 2 ml / 0.67 fl oz reagent
- 10 3ml disposable pipettes
- 1 x 50ml / 1.7 fl oz polyethylene bottle acid neutralizer with dropper
- 1 x 50ml / 1.7 fl oz polyethylene bottle distilled water with dropper
- 1 x 50ml / 1.7 fl oz plastic jars 2,5 cm / 1 in cotton gauze
- 3 x plastic jars, pure paraffin blocks
- 1 x plastic container
- 10 pair of latex gloves
- 1 x 50 ml / 1.7 fl oz glass beaker
- 1 x pair forceps 10 cm / 3.93 in
- 1 x pair of scissors 12,5 cm / 4.92 in

- 1 x paraffin applicator brush in container
- 1 x 60 ml / 2.03 fl oz liquid fuel burner
- 15 x 110mm / 4.33 in filter paper
- 1 x 6cm / 2.36 in magnifying glass
- 1 x 50 ml / 1.7 fl oz liquid fuel
- Complete instructions to use



ANNEX D - 073

I. Trace metal detection spray:

When sprayed on the skin, detects individuals who have used a particular metallic object or weapon
200ml / 6,76 fl oz aerosol spray
Short-wave ultraviolet light visible reagents

ANNEX D - 074



I. Portable number restoration kit:

Used in the restoration of metal numbers filed off guns, weapons, motors and other metallic objects
Molded carrying case with cut foam inserts containing:

- 1 x 25ml / 0.84 fl oz glass bottle metal number restoring solution
- 1 x 25 ml / 0.84 fl oz glass bottle metal surfacing solution
- 1 x package swabbing cotton
- 1 steel file
- 2 x glass eyedropper pipettes
- 1 x package Emory cloth
- 1 x pair vinyl gloves
- 1 package of paraffin wax
- English instruction manual

ANNEX D - 075

I. Erased writing detection kit:

Used in the restoration of erased writing using chemical and fuming reagents

For use on all official papers and legal documents

Molded carrying case with cut foam insert containing the following:

- 1 x examination stand magnifiers 5 x
- 1 x 4 watt ultraviolet light, battery operated
- 1 x 4 watt, cool white tube light
- 10 x polyethylene fuming bags 230mm / 9.05 in x 305mm / 12 in
- 1 x 50 ml / 1.7 fl oz jar iodine-based developer
- 3 x 25 ml / 0.84 fl oz different erased writing ink solutions
- 1 x 25 ml / 0.84 fl oz removal solution
- 1 x 25 ml / 0.84 fl oz fixative solution
- 1 x solution applicator brush
- 1 x package swabbing cotton
- 12 x cotton applicator swabs
- English instruction manual



ANNEX D - 076

I. Latent prints lifters:

For use on any surface

Used in the lifting of latent print powder developed prints

When lifting, the lifter does not alter, spoil or smear the original impression

Protective backing cover on each lifter

Color: white, black and transparent

- Size:
1. 5cm / 2 in x 5cm / 2 in white
 2. 5cm / 2 in x 5cm / 2 in black
 3. 5cm / 2 in x 10cm / 4 in white
 4. 5cm / 2 in x 10cm / 4 in black
 5. 7.5cm / 3 in x 10cm / 4 in white
 6. 7.5cm / 3 in x 10cm / 4 in black
 7. 10cm / 4 in x 12.5cm / 5 in white
 8. 10cm / 4 in x 12.5cm / 5 in black
 9. 10cm / 4 in x 25cm / 10 in white
 10. 10cm / 4 in x 25cm / 10 in black
 11. 12.5cm / 5 in x 18cm / 7 in white
 12. 12.5cm / 5 in x 18cm / 7 in black
 13. 12.5cm / 5 in x 18cm / 7 in transparent
 14. 12.5cm / 5 in x 36cm / 14 in white
 15. 12.5cm / 5 in x 36cm / 14 in black
 16. 12.5cm / 5 in x 36cm / 14 in transparent

All sizes can vary +/- 5%



ANNEX D - 077

I. Explosives testing kit:

Provides for the simple and rapid detection and identification of explosives

Kit identifies all well-known types of military and commercially available explosives to include homemade nitrate and chlorate based explosives:

Detection of persons having handled explosives

Detection of surfaces having had contact with explosives

Molded carrying case with cut foam inserts

Detection in four main groups;

Group A = polynitro aromatics

Group B = nitrate ester and nitramines

Group C = nitrate salts

Group D = chlorates

Maximum test sensitivity

Group A = 0.1-1gg

Group B = 0.01-0.1gg

Group C = 0.01gg

Group D = 10gg

1 year shelf life



ANNEX D - 078

I. Refill for explosive testing kit ETK Plus™

I. I. Glass Ampoules in plastic tube NR 1

I. II. Glass Ampoules in plastic tube NR 2

I. III. Glass Ampoules in plastic tube NR 3

I. IV. Glass Ampoules in plastic tube NR 4

I. V. 25 test buttons round

I. VI. 25-test buttons paper





ANNEX D - 079

I. Narcotics identification kit:

Positively identifies narcotics, hallucinogens and other dangerous drugs.
 Kit contains the following different reagents packed at 10 tests per box:

- Test for general test for narcotic alkaloids
- Test for general test for opium alkaloids
- Test to differentiate heroin from morphine
- Test for cocaine, procaine, tereacaine and methadone
- Test for barbiturate
- Test for amphetamines
- Test for hallucinogens
- Test for marijuana, hashish, THC and residues of THC in smocking eq.
- Test for presumptive identification of cocaine base



ANNEX D - 080

I. Refill for Narcotics identification system:

Reagents packed 10 per box. Tests identify the following drugs:

- I.I. General test for narcotic alkaloids
- I.II. General test for opium alkaloids
- I.III. Test to differentiate heroin from morphine
- I.IV. Test for cocaine, procaine, tereacaine and methadone
- I.V. Test for barbiturates
- I.VI. Test for amphetamines
- I.VII. Test for hallucinogens
- I.VIII. Test for marijuana, hashish, THC and residues
- I.IX. Test for presumptive identification of cocaine base
- I.X. Test for methaqualone
- I.XI. Test for ephedrine
- I.XII. Test for LSD

ANNEX D - 081

I. Rape Evidence collection kit: (Victim and Suspect)

Law enforcement agency and medical center approved kit for collecting evidence in alleged rape and sexual assault cases

Sealed kit with evidence label containing following Items:



- 1 x cervical scraper
- 1 x slide holder with 2 glass slides
(Vaginal smear slide holder)
- 1 x plastic comb
- 1 x pubic hair collection lifter
- 2 x white dry gummed envelopes marked in combed hairs in
- 2 x white dry gummed envelopes marked in standard hairs in
- 2 x self-adhesive evidence seals
- 2 x seminal fluid reagent packet containing: Acid phosphates test tablet, sterile gauze pad, and plastic evidence bag
- 1 x English instruction manual



ANNEX D - 082

I. Blood detection kit:

Self-contained unit consisting of two ampoules of pre-measured reagent with disposable plastic tubes
Test does not destroy or damage evidence
Box of 10

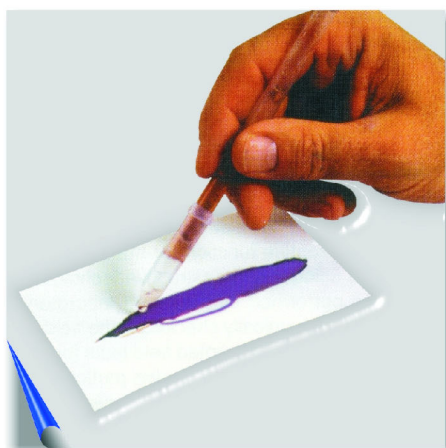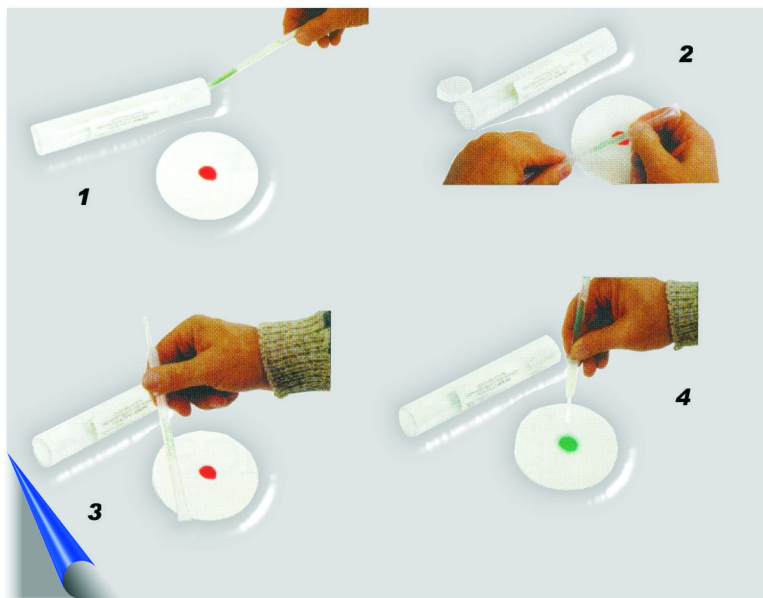

ANNEX D - 083

I. Semen detection kit:

Self-contained unit consisting of two ampoules of pre-measured reagent with disposable plastic tubes
Test does not destroy or damage evidence
Box of 10

ANNEX D - 084

I. Criminal investigation micro-instrument kit:

Kit with different micro instruments for crime investigation, containing:

- 3 x different shapes of scalpels (10 cm)
- 3 x different shapes of pincers (10 cm)
- 2 x different shapes of tweezers (10 cm)
- 2 different shapes of scissors (20cm)
- 10 wooden spatulas (10 cm)
- 2 small pincer/lifter
- 1 screw type ridge counter with cover/cap (12 cm)



ANNEX D - 085

I. Decontaminating fluid:

EPA approved disinfectant for use against blood borne pathogens (i.e., effective against HIV and tuberculosis) and a variety of other common disease-causing organisms

Used to clean contaminated tools and equipment

Kills 99.9 percent or more of microbes

1-liter bottles

ANSI (American National Standards Institute) ISEA (Industrial Safety Equipment Association) EN (European Norm)



ANNEX D - 086

I. Disposable coveralls:

Made of a material that is virtually tear-free, puncture proof
Elastic wrist and ankles
Supplied with an attached hood
Full cut for comfort
Zippered front
Color white
Sizes M, L, XL, XXL, and XXXL
The coverall meets EN/ANSI/ISEA standards
ANSI (American National Standards Institute)
ISEA (Industrial Safety Equipment Association)
EN (European Norm)



ANNEX D - 087

I. Disposable boots:

Made of a material that is virtually tear-free, puncture proof
With a non-skid bottom and conductive strip to dissipate static electricity.
One size fits over any size shoe.
Boots meets or EN (European Norm)/ANSI (American National Standards Institute)/ISEA (Industrial Safety Equipment Association) standards

ANNEX D - 088

I. Disposable latex gloves:

Ambidextrous. 228mm / 8.97 in length, 0.12mm / 0.005 in thickness
Natural rubber, hypoallergenic strong elastic latex glove
Lightly powdered
Tactility and sensitivity retained when worn
100 gloves per dispenser box
Sizes S, M, or L
Gloves meets EN (European Norm)/ANSI (American National Standards Institute)/ISEA (Industrial Safety Equipment Association) standards





ANNEX D - 089


I. Seat belt cutter:

*Fixed blade cuts through seat belt webbing
Covered/retractable blade to prevent injury
Supplied with a handle or finger hole for cutter control
Mounting device for fixing inside the car.*

ANNEX D - 090

I. Leg irons:

*The rotating arm has fast, smooth, positive lock case pass-through features.
Perimeter minimum: 203 mm / 8.0 in
Perimeter maximum: 273mm / 10.75 in
Swivels on the connecting chain
Minimum 20 locking positions
Thickness of rotating arm is 5 mm / 0.19 in
Heavy-duty rivets, riveted on multiple locations
355 mm / 14 in (+/- 10%) heat-treated chain connected to the swivel on the cuff body at each end
Push button operated double-locking mechanism: The pin on the key into the hole on the top of the lock case will activate the double lock.
Weight minimum 600g / 21 oz
Made of nickel plated steel
Certified by law enforcement agencies*




ANNEX D - 091

I. Riot control stick (Multi –Purpose Baton):

Side handle baton
 Single piece polycarbonate construction
 High form stability at temperatures between -40°C
 $/ -40^{\circ}\text{F}$ and $+70^{\circ}\text{C} / 158^{\circ}\text{F}$
 Shock absorbing
 Oval wrist area
 Inner tube polycarbonate
 Length: 500mm / 19.68 in
 Diameter: 30mm / 1.18 in
 Side grip height 110mm / 4.33 in
 Certified for use by law enforcement agencies

II. Baton holder for belt:

Made of black Cordura
 Fit belts from 45mm / 1.77 in to 55mm / 2.16 in
 No-wear, no-glare, single black snap
 Ring diameter to fit baton listed in I. above

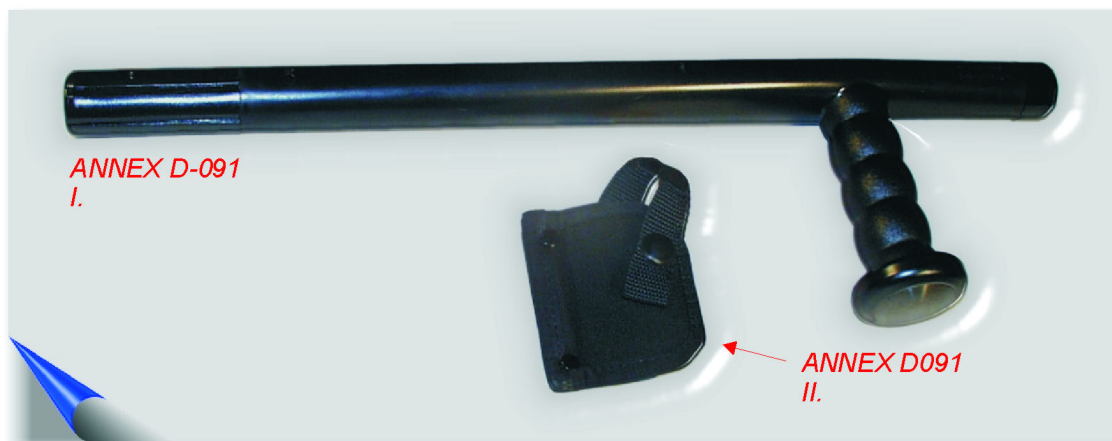

ANNEX 092-

I. Raid vest with printed police logo:

For plain clothes officer
 Foldable to a small size
 Black, 5 button/snap, 100% polyester
 police vest
 Logo on the back POLICE in 7,5cm in
 height, white letters
 One size fits all

ANNEX D - 093

I. Ballistic shield:

Ballistic shield rated to threat level III specified by (DIN) 52290 or equivalent certification

Threat Level: 7.62 NATO Ball 150 grain FMJ (303)
30.06 PSP 180 grain
.30 Carbine 110 Grain FMF
12 Gauge Rifled Slug
.229.55 Grain FMJ (5.56 MM)
7.62 x 39 150 Grain FMJ


Rectangular design, light semicircle on the wide Size:

Height: 1300 mm / 51.2 in)
Wide: 600 mm / 23.6 in)
Maximum weight 18 kg / 39.7 lbs
Free standing
Made of non-woven composite fabrics
Ultra-high molecular weight (UHMW)
polyethylene fibers
Abrasion, moisture, chemical,
ultra-violet and cut resistant
Supplied with a ballistic glass
laminated window

Size of the window:
Length: 200 mm / 7.85 in
High: 100 mm / 3.9 in

Window rated to threat Level III

Supplied with a sturdy comfortable
fitting handle, with adjustable fastener
Supplied with a harness for transpor-
tation
Supplied with a wheel assembly for
moving on flat surfaces.
Certified for use by law enforcement
Agencies



ANNEX D - 094

I. Riot control helmets:

Designed for tactical/riot duty applications

One-piece shell construction

Protection for ear and neck area

Inside liner consists of a double, shockproof and energy-absorbing layer

Retention system: nylon webbing with quick close/release locking system

Supplied with chin cup

Webbing attached to shell by heavy-duty rivets

Supplied with a polycarbonate 2mm /0.07 in visor

Inspection window minimum area 700 sq mm/ 1.8 sq in

Face shield is fully adjustable in up and down positions

Removable neck protector

Weight: maximum 1500 g / 53 oz (+/- 50g / 1.76 oz per size)

All metallic materials are stainless steel

Approved by: DIN

Color: Dull black

Certified for use by law enforcement agencies





ANNEX D - 095

I. Non-lethal intervention gun:

- Gun launches flash-bang-ball cartridges*
- Safety-engineered double action to prevent accidental discharge*
- Caliber: 44 mm*
- Length: 35cm / 13.77 in to 40cm / 15.75 in*
- Weight: maximum 1500 g / 53 oz unloaded*
- Designed for special police operations*
- Two barrels to enable 2 different types of ammunition to be used in graduate response*
- Shoulder sling*
- Adaptable steel stock*
- Cleaning kit*
- Transport bag stores launcher and 10 cartridges*
- Certified for use by law enforcement agencies*



ANNEX D - 095

II. Soft rubber ball:

Cartridge filled with a rubber ball
 Rubber ball weight (+/- 10 %) 28g / 0.98 oz
 Maximum 200 joules at 2.5m / 8.2 ft

III. Soft rubber buckshot:

Cartridge filled with approx. 9 soft rubber
 17mm / 0.66 in buckshot

IV. Dye ball

Cartridge contains 23 g / 0.81 oz of oil and
 non-toxic color dye.
 Effective up to 50 m / 164 ft

ANNEX D - 095A

VI. CS powder tear ball


Cartridge contains approximately,
 23 g / 0.81 oz of 90 % CS powder
 On impact it should split and release large
 quantity of CS
 Minimum effective range of 50 m / 164 ft


VII. Training Cartridges:

Soft rubber ball training cartridge
 Soft rubber buckshot training cartridge
 Dye ball training cartridge
 Flash ball training cartridge
 CS powder tear ball

V. Flash ball:

Blinding flash cartridge

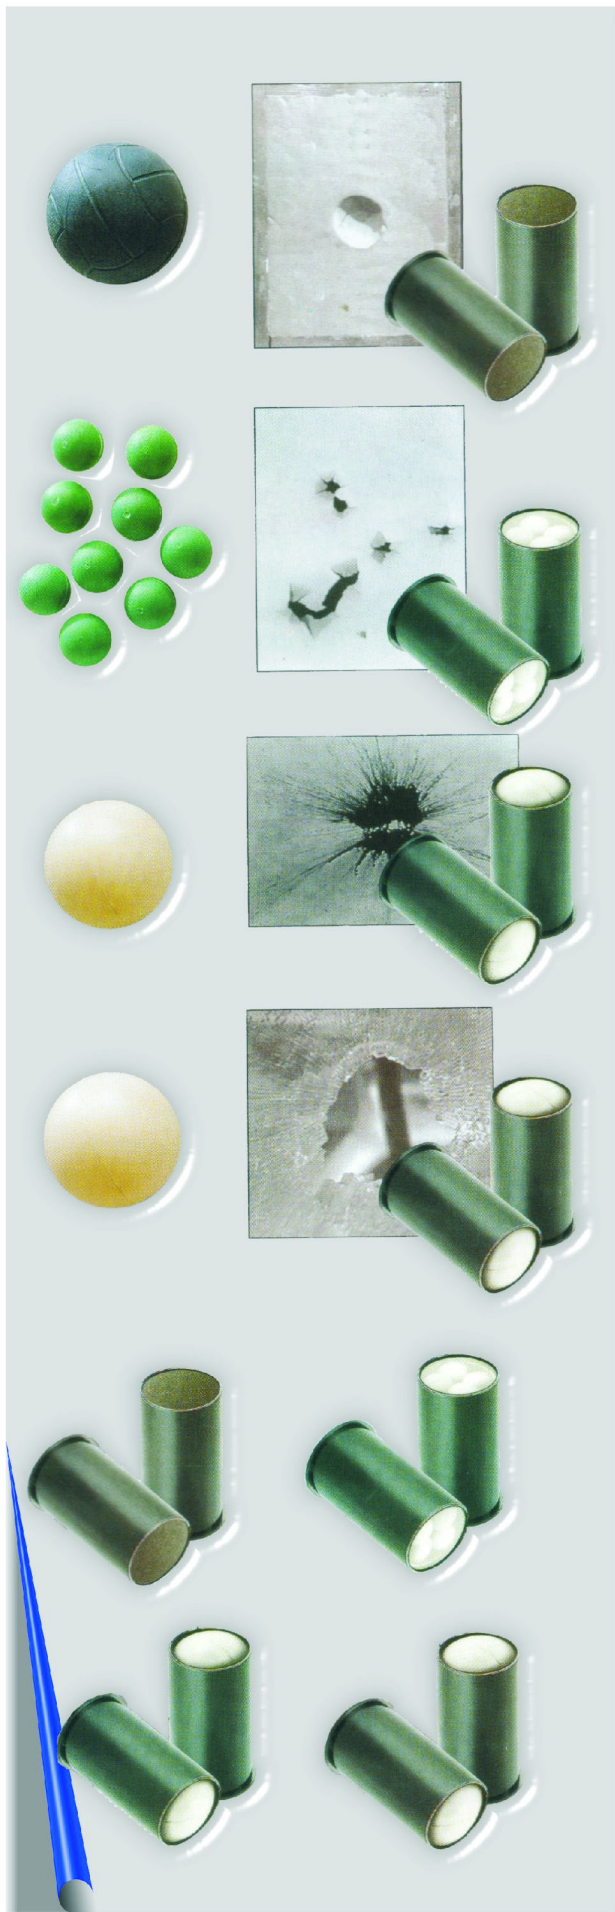

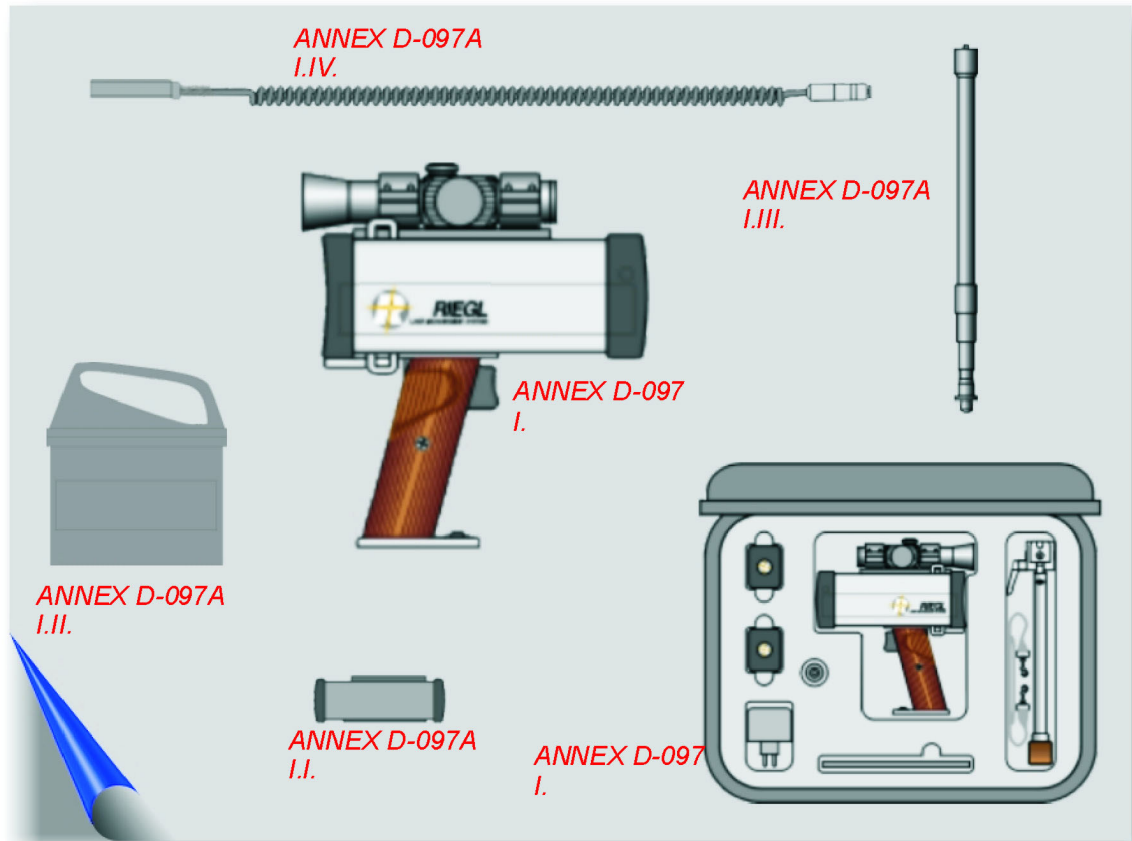

ANNEX 097-

I. Traffic –speed measuring device:

Professional vehicle speed measuring device

Operating range measuring distances: 30m / 98 ft up to 300 m / 984 ft

*Speed measuring range: 0 – up to 250 km/h
0 – up to 174 MPH*

*Speed measuring fault: maximum +/- 3-km/h speed up to 100 km/h
Maximum +/- 1.8 MPH speed up to 62 MPH
Maximum +/- 3% total for more than 100 km/h
Maximum +/- 3% total for more than 62 MPH*

Measuring time maximum 0.5 seconds

Aiming device with adjustable brightness

Power supply with rechargeable batteries

Portable operation

Operates through a vehicle windshield

Stable, scratch-resistant aluminum housing with rubber armoring

Adjustable speed limit with acoustical signal

Battery charger operates at 110/230 VAC at 50/60 Hz

With European standard two –pin DN 49441 plug

Laser beam eye safety class 1

Adjustable high quality shoulder stock

Splash/water proof transport case

English user manual, spare parts list and worldwide service center locations



ANNEX D - 097A

I. Accessories for traffic –speed-measuring device:

I. I. Ni Cad rechargeable battery:

For use with the RIEGL™ speed measuring device LR90-235/P
High performance battery of approximately 1.5 hours duration
Short charge time
Lightweight

I. II. PbGel-high volume rechargeable battery:

For operation on RIEGL™ speed measuring device LR90-235/P
Form high performance up to 6 hours.
With charger unit supplied with European standard plug
Two pins DIN 49441
Including a carry case with shoulder strap

I. III. Mono-pod:

Telescopic monopod
For operation on RIEGL™ speed measuring device LR90-235/P
Maximum length 160cm / 63 in
Mounted by screwing into the steel thread of the battery or the end plate of the power supply cable.
Color – grey

I. IV. Power supply cable:

Cable for external 12 /14 VDC power supply
For operation on RIEGL™ speed measuring device LR90-235/P
Fits all standard car cigarette lighters